


PoE•X AC Adapter Accessory

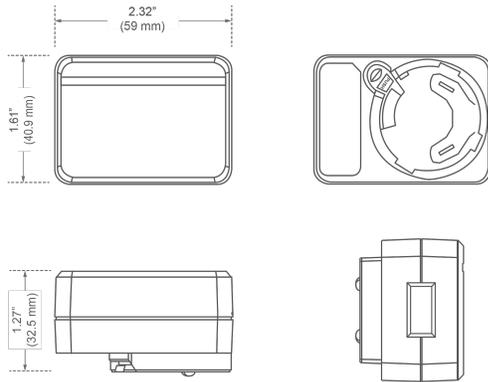

General Description

The [AC Adapter](#) is an accessory available for your [PoE•X Device](#). This is an AC Input 5W 5VDC Output Efficiency Level VI device, containing over-current protection and short-circuit protection.

In the Box

- Interchangeable AU, EU, or UK plug
- 1.524M USB Cable

Technical / Device Specifications

DEVICE SPECIFICATIONS

Part Number	MNA-PA-INT		
Cable	2.1 x 5.5 mm barrel plug cable		
Input Voltage	Minimum 90VAC	Nominal 100VAC ~240VAC	Maximum 264VAC
Input Frequency	Minimum 47Hz	Nominal 60Hz/50Hz	Maximum 63 Hz
Input AC Current	0.3Amax @ 100-240VAC input and full load		
Inrush Current (cold start)	40Amax @ 264VAC input		
Average Efficiency	73.62%min.@ Nominal input		
Energy Consumption	Rated input 100-240V		
Input	No-load power consumption < 0.1W		
Output Load	+5V		
Line Regulation	+/- 1%		
Load Regulation	+/-5%		
Operating Temperature and Relative Humidity	0°C to +40°C (32°F to +104°F) 10%RH to 90%RH		
Storage Temperature and Relative Humidity	-20°C to +80°C (-4°F to +176°F) 5%RH to 90%RH non-condensing @ sea level below 2,000 meters		
Regulatory Standards & Certifications	TYPE RoHS 2003 GS/CE UL/FCC PCE CCC GEMS SSA/RCM	COUNTRY Europe USA Japan China Australia Australia/New Zealand	STANDARD 2002/95/EC EN60950-1 UL60950, FCC Part 15 class B J61558-1/-2, J55014-1 GB4943, 1-2011; GB9254-2008; GB17625, 1-2012 GEMS Section 41 AS/NZS 60335.2.29:2004 Inc A1-2



Monnit Corporation
 3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555
www.monnit.com